




Apply new thread locker after disassembly



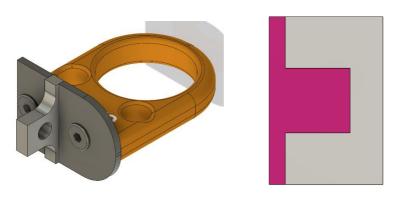

Position the sticker as shown below and cut away the **pink** part.

